



# BOOM TRUCK 60 TONS

TEREX CROSSOVER 6000

**BOOM LENGTHS:**  
35 TO 110FT

**JIB LENGTHS:**  
32 TO 57FT

**JIB OFFSETS:**  
0 - 15 - 30



# NOTES:



**TEREX®**

## **CROSSOVER 6000**

**60T capacity class**

**Boom truck crane**

**Datasheet**

**imperial**

# **CROSSOVER 6000**



### **Features**

- ▶ 60 tons @ 10 ft capacity at rated distance from center of rotation
- ▶ 110 ft maximum boom length
- ▶ 118 ft maximum tip height
- ▶ 32/57 ft optional jib
- ▶ 170 ft maximum sheave height with 47 ft jib
- ▶ Operator cab – standard
- ▶ Rated capacity indicator with work area definition

**WORKS FOR YOU.™**

## Key

.....	3
-------	---

## Dimensions

Crane Dimensions .....	4-5
Area of Operation .....	5
Mounting Specifications .....	5
Specifications .....	6
Range Diagram .....	7, 12

## Load Charts

Boom.....	8
Jib .....	13

## Technical Description

Boom, Jib and Rotation.....	17
Boom Rotation .....	17
Hoists and Rope .....	18
Hydraulics .....	18
Upper Operator Cab .....	19
Counterweight .....	19
Outriggers .....	19


































**NESS CAMPBELL**  
CRANE + RIGGING

PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)

# KEY

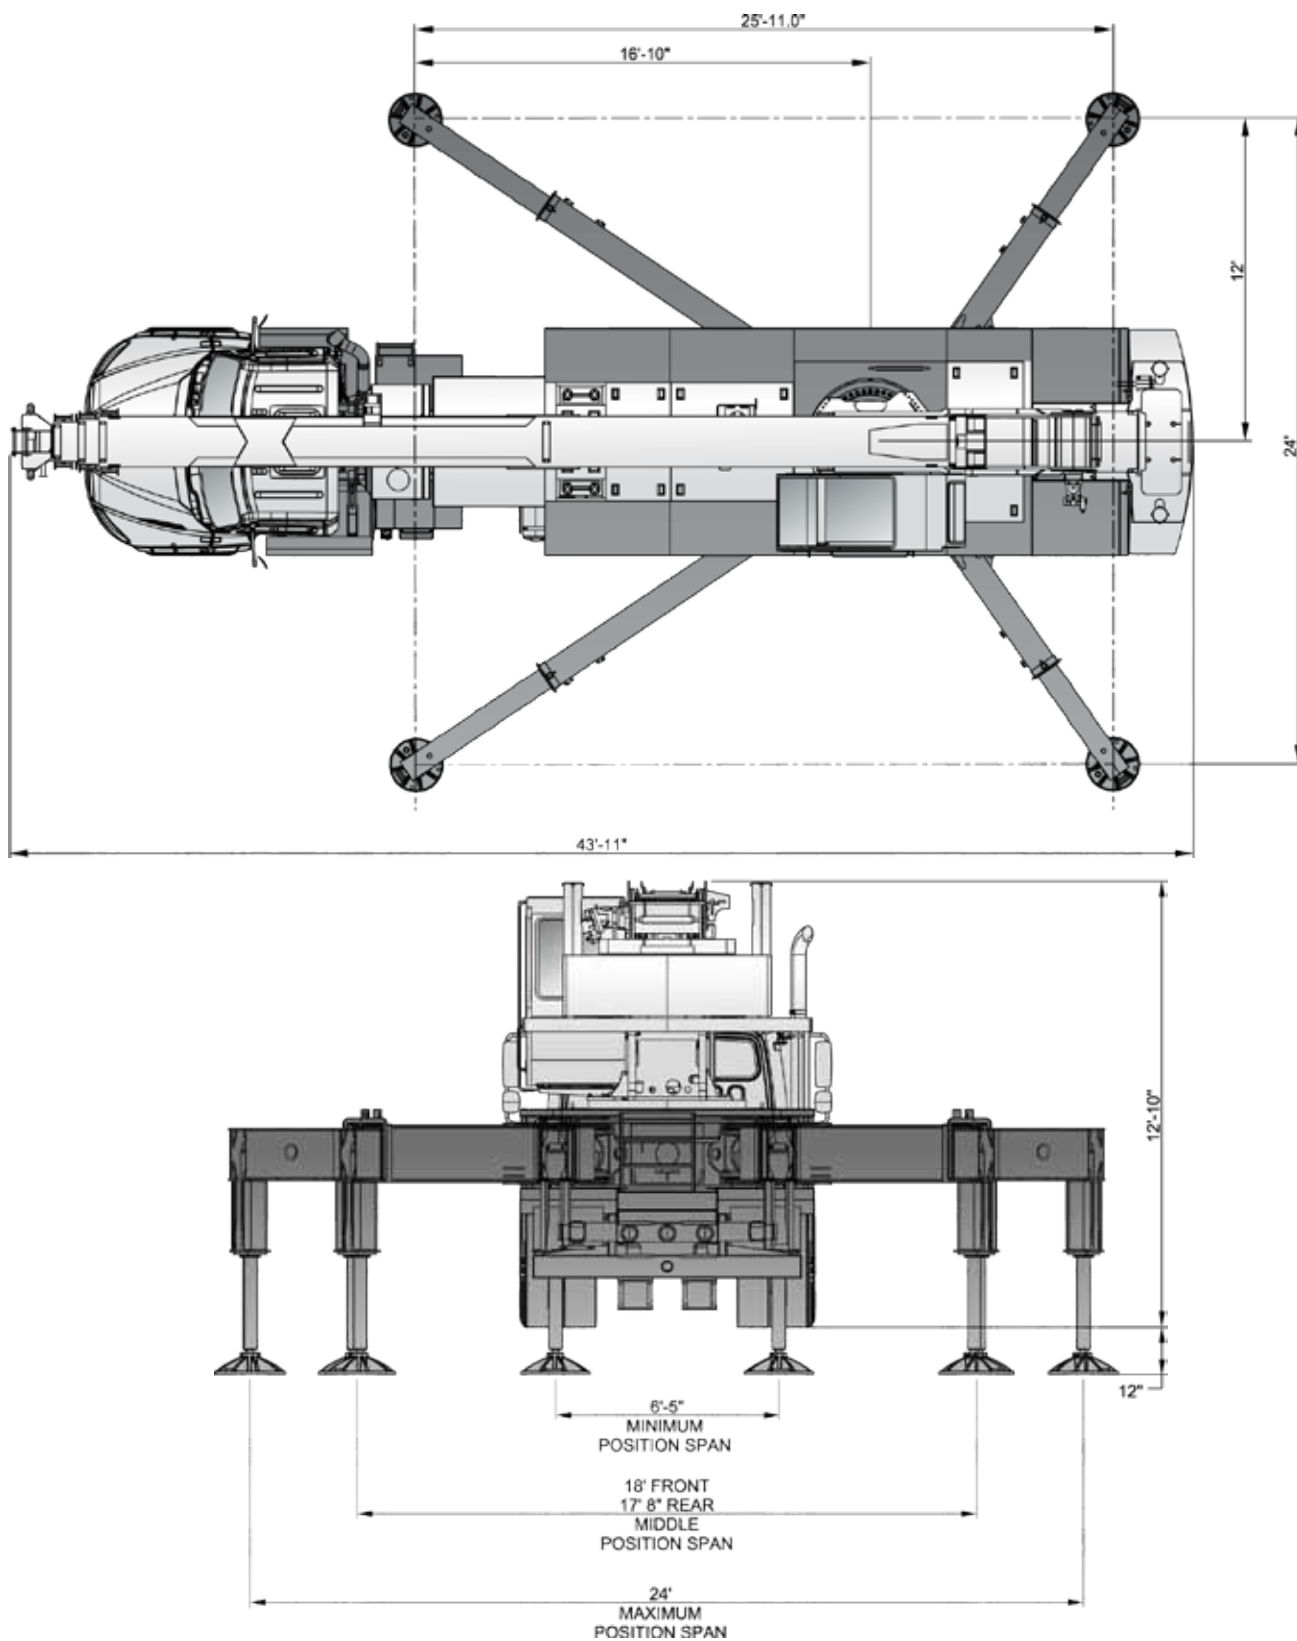
# CROSSOVER 6000

	Main boom		Counterweight
	Boom length		Main Hoist
	Tip height		Auxiliary hoist
	Boom with jib		Hoist line speed
	Telescoping mode		Cab
	Boom angle		Operator aid
	Working radius		Controls
	Main boom with aux head		Hydraulics
	Boom head		Heating / Air conditioning
	Hook block		Outriggers
	Hook to head sheave pin		Rotation / Allowable rotation range
	Rope – Standard / Optional		Slewing brake
	Rope diameter		Boom over the rear
	Rope length		Boom over the front
	Permissible line pull		Area of operation
	Maximum line pull		

# DIMENSIONS

## Crane Dimensions

## CROSSOVER 6000

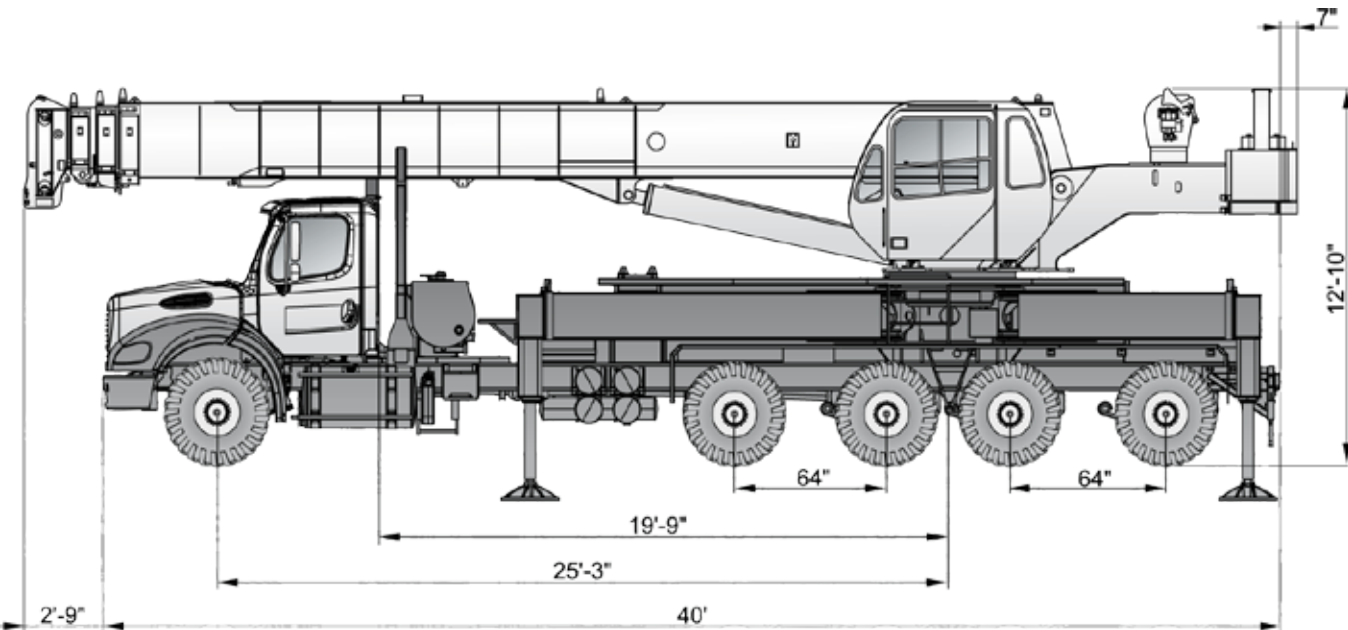


PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)


# DIMENSIONS

# CROSSOVER 6000

## Crane Dimensions



## Area of Operation



## Mounting Specifications




















Gross Vehicle Weight Rating .....	102,500 lb	Base machine .....	79,500 lb
Front Axle Weight Rating .....	20,000 lb	Crane fitted with jib and mounted on Freightliner chassis with flatbed.	
Rear Axle Weight Rating .....	40,000 lb	Estimated minimum chassis weight:	
Pusher .....	20,000 lb	Front axle .....	11,000 lb*
Tag .....	22,500 lb	Tandem axles .....	13,000 lb*
Wheelbase .....	303 in	Total weight .....	24,000 lb
Cab to Axle .....	237 in		
Afterframe .....	124 in		
RBM per Frame Rail .....	3,300,000 lb-in		
Frame Height (Unloaded) .....	42 in		

\* Minimum bare chassis weight requirements. Must ballast to minimum if required.

# SPECIFICATIONS

## CROSSOVER 6000

### Approximate Crane Weights

Mounted on a Freightliner 114SD with 5 axle configuration					
<b>Configuration:</b>  1/4 tank fuel 200 lb operator in cab 110 ft boom / no jib Base counterweight		GVW 77 847	Front 13 910	Pusher 20 000	Tridem 43 937
<b>Options:</b>  Full tank of fuel		555	424		131
 2 Auxiliary winch with rope		0	0		0
 33'-57' extendable jib		2 170	1 294		876
 32' jib		1 270	818		452
 Auxiliary winch head		100	128		- 28
 60 ton 5 sheave block at bumper		1 157	1346		- 189
 40 ton 4 sheave block at bumper		690	803		- 113
 7 ton or 12 ton O-ball at bumper		250	291		- 41
 3 000 lb counterweight on superstructure		3 000	- 1 451		4 451
 3 000 lb on storage rack		3 000	1 214		1 786
 7 000 lb counterweight on superstructure		7 000	- 3 385		10 385
 7 000 lb on storage rack		7 000	2 832		4 168
 12 000 lb counterweight on superstructure		12 000	- 5 803		17 803
 12 000 lb on storage rack		12 000	4 855		7 145



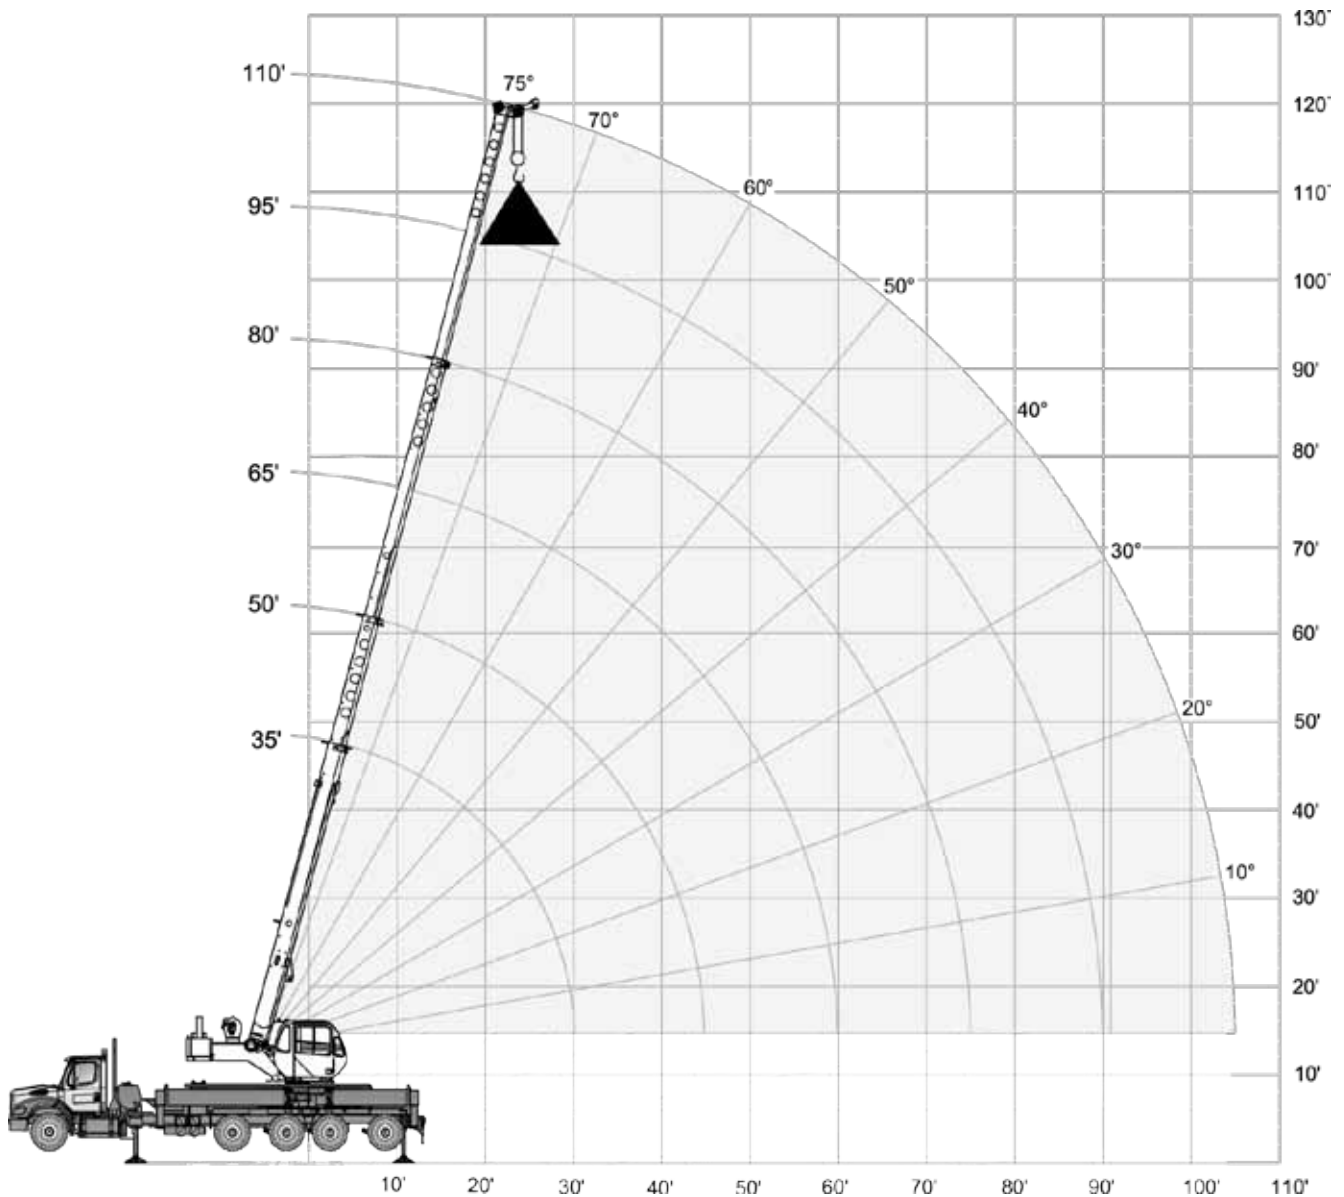

PORTLAND OFFICE: 503.283.3111  
 SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)



# RANGE DIAGRAM

Outriggers Fully Extended (100%)

CROSSOVER 6000



PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)


# BOOM LOAD CHART

## CROSSOVER 6000


### Outriggers Fully Extended (100%)

 16,500 lbs















 (100%)

 over rear

 360°

 35 to 110 ft

Standard ASME  
B30.5

	Boom Length												
	35 ft		50 ft		65 ft		80 ft		95 ft		110 ft		
													
ft	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	ft
10	120,000	120,000	80,000	80,000									10
12	107,000	100,700	80,000	80,000									12
15	87,100	87,100	78,400	78,400	61,900	61,900							15
20	62,900	62,900	64,200	64,200	54,800	54,800	46,200	46,200					20
25	48,300	48,300	49,600	49,600	49,100	49,100	40,700	40,700	35,300	35,300			25
30	36,800	36,800	39,800	39,800	40,500	40,500	36,000	36,000	31,100	31,100	27,500	27,500	30
35			32,800	32,800	33,500	33,500	32,200	32,200	27,900	27,900	24,800	24,800	35
40			27,500	27,500	28,200	28,200	28,600	28,600	25,200	25,200	22,500	22,500	40
45			22,200	22,200	24,100	24,100	24,600	24,500	23,100	23,100	20,500	20,500	45
50					20,200	20,100	21,100	20,500	21,300	20,700	18,800	18,800	50
55					17,600	17,000	18,100	17,400	18,300	17,600	17,400	17,400	55
60					14,700	14,400	15,600	14,900	15,900	15,100	15,200	15,000	60
65							13,600	12,900	13,900	13,200	13,300	13,200	65
70							11,900	11,200	12,200	11,500	11,600	11,500	70
75							9,700	9,700	10,800	10,100	10,300	10,100	75
80									9,600	8,900	9,100	8,800	80
85									8,500	7,800	8,000	7,800	85
90									7,000	6,900	7,100	6,800	90
95											6,300	6,000	95
100											5,600	5,300	100
105											4,900	4,600	105

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.




PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)


# BOOM LOAD CHART

## CROSSOVER 6000


### Outriggers Fully Extended (100%)

 11,500 lbs















 (100%)

 over rear

 360°

 35 to 110 ft

Standard ASME  
B30.5

	Boom Length												
	35 ft		50 ft		65 ft		80 ft		95 ft		110 ft		
													
ft	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	ft
10	120,000	120,000	80,000	80,000									10
12	106,800	98,500	80,000	80,000									12
15	83,700	80,800	78,400	78,400	61,900	61,900							15
20	60,400	60,400	61,600	61,600	54,800	54,800	46,200	46,200					20
25	46,200	46,200	47,600	47,600	48,200	48,200	40,700	40,700	35,300	35,300			25
30	36,600	36,600	38,100	38,100	38,800	38,800	36,000	36,000	31,100	31,100	27,500	27,500	30
35			31,400	31,400	32,000	32,000	32,200	32,200	28,000	27,900	24,800	24,800	35
40			26,200	25,600	27,000	26,300	27,400	26,600	25,200	25,200	22,500	22,500	40
45			21,400	20,400	22,300	21,300	22,700	21,600	22,800	21,800	20,600	20,500	45
50					18,700	17,600	19,100	17,900	19,300	18,100	18,800	18,300	50
55					15,800	14,600	16,300	15,100	16,500	15,300	16,600	15,400	55
60					13,400	12,300	14,000	12,800	14,300	13,000	14,400	13,200	60
65							12,100	10,900	12,400	11,200	12,500	11,300	65
70							10,500	9,400	10,800	9,700	11,000	9,800	70
75							9,100	8,000	9,500	8,400	9,700	8,500	75
80									8,300	7,300	8,500	7,400	80
85									7,300	6,300	7,500	6,500	85
90									6,400	5,400	6,600	5,700	90
95											5,900	4,900	95
100											5,200	4,200	100
105											4,500	3,600	105

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.




PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)


# BOOM LOAD CHART

## CROSSOVER 6000

### Outriggers Fully Extended (100%)

 7,500 lbs















 (100%)

 over rear

 360°

 35 to 110 ft

Standard ASME  
B30.5

	Boom Length												
	35 ft		50 ft		65 ft		80 ft		95 ft		110 ft		
													
ft	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	ft
10	120,000	120,000	80,000	80,000									10
12	103,400	96,800	80,000	80,000									12
15	81,000	79,100	78,400	78,400	61,900	61,900							15
20	58,300	58,300	59,600	59,600	54,800	54,800	46,200	46,200					20
25	44,600	42,600	45,900	45,900	46,600	46,600	40,700	40,700	35,300	35,300			25
30	35,300	33,300	36,800	36,800	37,400	37,400	36,000	36,000	31,100	31,100	27,500	27,500	30
35			29,100	29,500	29,700	30,100	30,000	30,500	27,900	27,900	24,800	24,800	35
40			23,100	22,900	23,900	23,600	24,200	23,900	24,400	24,100	22,500	22,500	40
45			18,700	18,100	19,600	19,000	19,900	19,300	20,100	19,500	20,300	19,700	45
50					16,300	15,600	16,700	15,900	16,900	16,100	17,000	16,300	50
55					13,700	12,900	14,200	13,300	14,400	13,500	14,500	13,700	55
60					11,600	10,700	12,100	11,300	12,400	11,500	12,500	11,600	60
65							10,400	9,600	10,700	9,800	10,800	9,900	65
70							9,000	8,100	9,300	8,400	9,500	8,600	70
75							7,700	6,900	8,100	7,200	8,300	7,400	75
80									7,000	6,200	7,200	6,400	80
85									6,100	5,300	6,300	5,500	85
90									5,200	4,500	5,500	4,800	90
95											4,800	4,100	95
100											4,000	3,400	100
105											3,300	2,900	105

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.



PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)

# BOOM LOAD CHART

## CROSSOVER 6000

### Outriggers Fully Extended (100%)

 4,500 lbs















 (100%)

 over rear

 360°

 35 to 110 ft

Standard ASME  
B30.5

	Boom Length												
	35 ft		50 ft		65 ft		80 ft		95 ft		110 ft		
													
ft	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	lbs	ft
10	120,000	120,000	80,000	80,000									10
12	100,900	100,900	80,000	80,000									12
15	78,900	78,900	78,400	78,400	61,900	61,900							15
20	56,800	56,800	58,100	58,100	54,800	54,800	46,200	46,200					20
25	43,400	43,400	44,700	44,700	45,300	45,300	40,700	40,700	35,300	35,300			25
30	34,200	33,800	35,700	35,600	36,400	36,200	36,000	36,000	31,100	31,100	27,500	27,500	30
35			28,300	27,200	28,900	27,800	29,200	28,700	27,900	27,900	24,800	24,800	35
40			22,400	21,400	23,200	22,200	23,500	22,300	23,700	22,600	22,500	22,500	40
45			18,100	17,100	19,000	18,000	19,400	17,900	19,500	18,100	19,700	18,300	45
50					15,800	14,900	16,200	14,600	16,400	14,800	16,500	15,000	50
55					13,300	12,400	13,700	12,100	14,000	12,300	14,100	12,400	55
60					11,200	10,300	11,700	10,100	12,000	10,300	12,100	10,500	60
65							10,100	8,400	10,400	8,700	10,500	8,800	65
70							8,700	7,000	9,000	7,300	9,200	7,500	70
75							7,400	5,800	7,800	6,200	8,000	6,300	75
80									6,800	5,200	7,000	5,400	80
85									5,900	4,300	6,100	4,500	85
90									5,000	3,500	5,300	3,800	90
95											4,600	3,100	95
100											4,000	2,500	100
105											3,400	2,000	105

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.

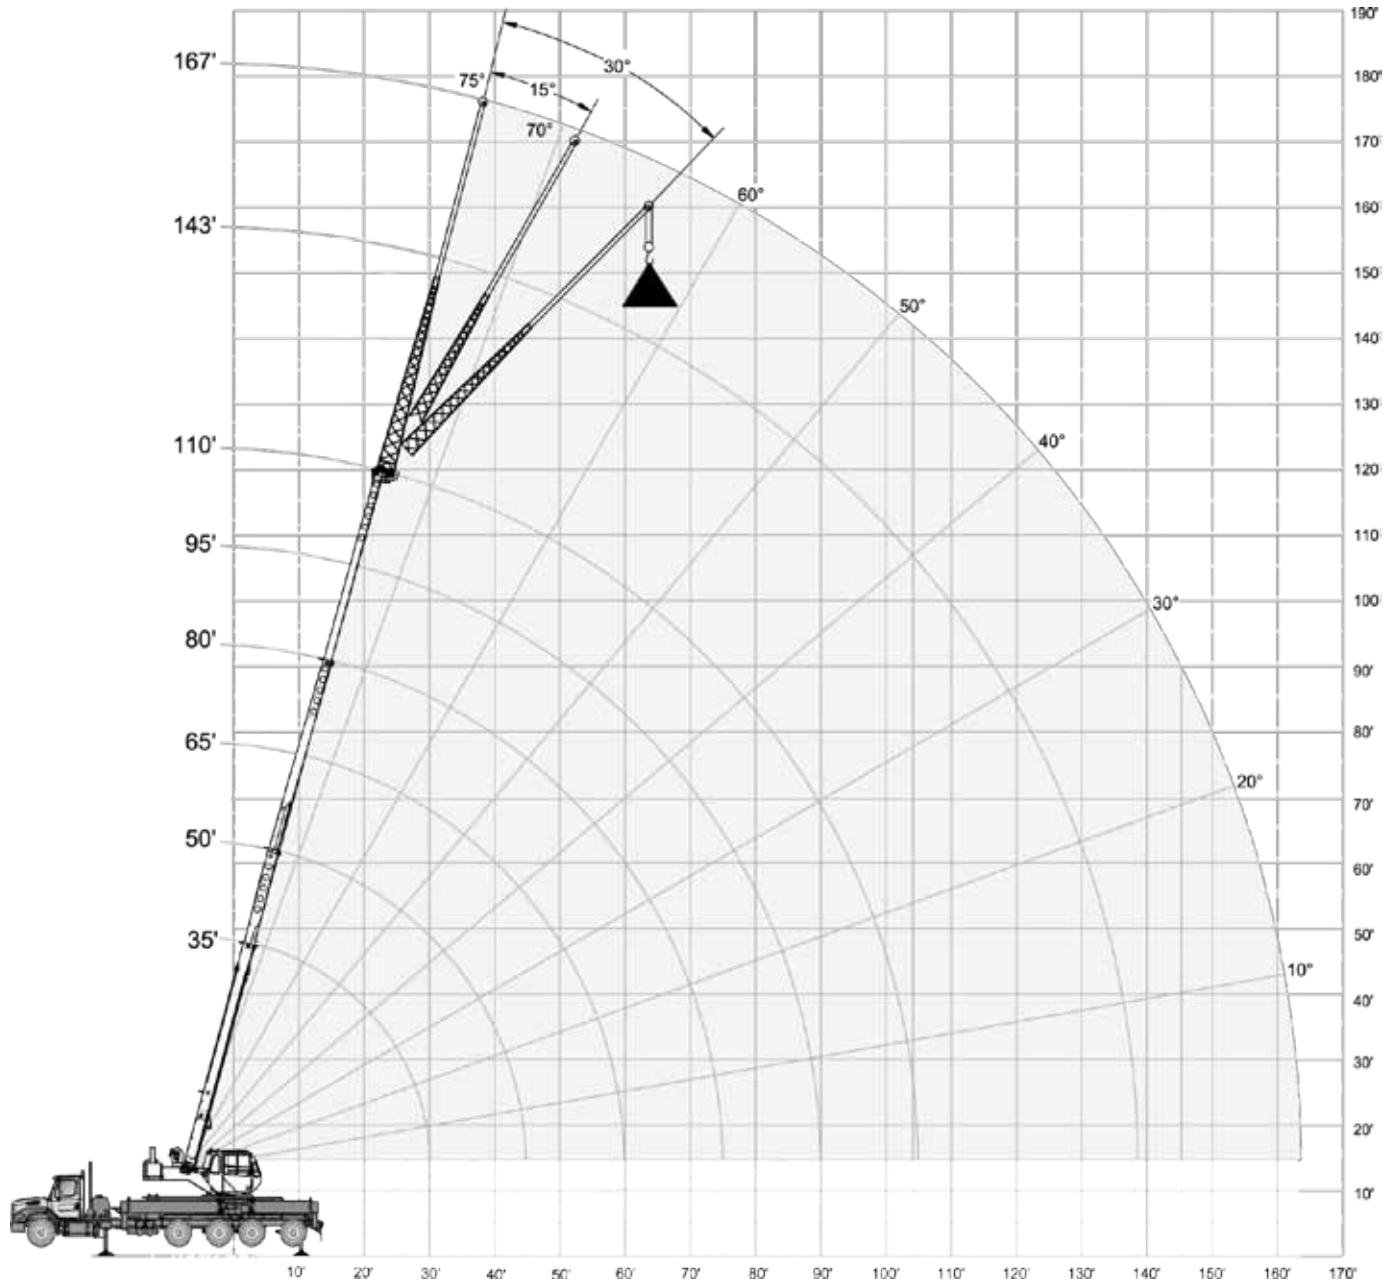



PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)

# RANGE DIAGRAM

With Jib

## CROSSOVER 6000



PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)

# LOAD CHART

## CROSSOVER 6000










### With Jib, Extended










 16,500 lbs

 (100%)

 360°

Standard ASME  
B30.5

32 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
36	12,500	12,500	47	8,500	8,500	53	6,400	6,400
42	11,800	11,800	52	8,100	8,100	58	6,200	6,200
47	11,200	11,200	57	7,800	7,800	62	6,100	6,100
55	10,300	10,300	64	7,500	7,500	69	5,900	5,900
63	9,500	9,500	71	7,100	7,100	75	5,900	5,900
70	8,800	8,800	77	6,700	6,700	81	5,600	5,600
77	8,200	8,200	83	6,400	6,400	87	5,400	5,400
85	7,600	7,600	91	6,200	6,200	94	5,300	5,300
93	7,100	7,100	98	5,900	5,900	101	5,200	5,200
100	6,700	6,700	105	5,600	5,600	107	5,100	5,100
107	6,100	5,700	111	5,400	5,400	113	5,000	5,000
114	5,300	4,800	117	5,000	4,700	119	5,000	4,600
122	4,500	4,000	124	4,300	3,900	125	4,300	3,900
128	3,800	3,200	129	3,700	3,100			
134	3,100	2,500	134	3,000	3,000			
137	400	400						

57 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
48	6,500	6,500	63	4,500	4,500	73	3,300	3,300
54	6,400	6,400	69	4,300	4,300	78	3,200	3,200
60	6,200	6,200	74	4,100	4,100	83	3,100	3,100
69	6,000	6,000	82	3,900	3,900	90	3,000	3,000
78	5,400	5,400	90	3,700	3,700	97	2,900	2,900
86	4,900	4,900	97	3,500	3,500	103	2,800	2,800
94	4,500	4,500	104	3,300	3,300	109	2,700	2,700
103	4,200	4,200	112	3,100	3,100	117	2,600	2,600
112	3,800	3,800	120	2,900	2,900	124	2,500	2,500
120	3,500	3,500	127	2,800	2,800	130	2,500	2,500
128	3,300	3,300	134	2,700	2,700	136	2,400	2,400
136	3,100	3,100	141	2,600	2,600	142	2,400	2,400
145	2,900	2,800	148	2,500	2,500	149	2,400	2,400
153	2,400	2,100	155	2,400	2,000			
159	2,000	1,700	160	2,000	1,600			
164	300	300						

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.




PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)

# LOAD CHART

## CROSSOVER 6000










### With Jib, Extended










 11,500 lbs

 (100%)

 360°

Standard ASME  
B30.5

32 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
38	12,500	12,500	47	8,500	8,500	53	6,400	6,400
43	12,000	11,800	52	8,100	8,100	58	6,200	6,200
48	11,500	11,200	57	7,800	7,800	62	6,100	6,100
56	10,900	10,300	64	7,500	7,500	69	5,900	5,900
63	9,900	8,500	70	7,100	7,100	76	5,900	5,900
70	9,200	8,800	77	6,700	6,700	82	5,600	5,600
77	8,900	8,200	83	6,400	6,400	87	5,400	5,400
85	7,900	7,600	91	6,200	6,200	95	5,300	5,300
93	7,200	6,600	98	5,900	5,900	101	5,200	5,200
100	6,100	5,600	104	5,600	5,200	107	5,100	5,100
106	5,200	4,700	110	5,000	4,400	113	4,900	4,400
113	4,400	3,800	117	4,300	3,700	118	4,200	3,700
121	3,600	3,100	124	3,600	3,000	124	3,500	3,000
127	3,000	2,500	129	3,000	2,500			
133	2,600	2,000	134	2,400	2,000			
139	400	400						

57 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
47	6,500	6,500	64	4,500	4,500	73	3,300	3,300
54	6,400	6,400	69	4,300	4,300	78	3,200	3,200
60	6,200	6,200	75	4,100	4,100	83	3,100	3,100
69	6,000	6,000	83	3,900	3,900	90	3,000	3,000
78	5,400	5,400	90	3,700	3,700	97	2,900	2,900
86	4,900	4,900	97	3,500	3,500	103	2,800	2,800
94	4,500	4,500	104	3,300	3,300	109	2,700	2,700
104	4,200	4,200	113	3,100	3,100	117	2,600	2,600
113	3,800	3,400	120	2,900	2,900	124	2,500	2,500
121	3,500	3,000	128	2,800	2,800	130	2,500	2,500
128	3,200	2,800	134	2,700	2,700	136	2,400	2,400
136	2,800	2,400	141	2,600	2,300	142	2,400	2,300
144	2,300	2,000	148	2,300	1,800	149	2,200	
152	1,900	1,600	155	1,800	1,400			
159	1,400	1,100	160	1,300	1,000			
164	300	300						

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.




PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)



# LOAD CHART

## CROSSOVER 6000










### With Jib, Extended










 7,500 lbs

 (100%)

 360°

Standard ASME  
B30.5

32 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
38	12,500	12,500	47	8,500	8,500	53	6,400	6,400
43	11,800	11,800	52	8,100	8,100	58	6,200	6,200
49	11,200	11,200	57	7,800	7,800	63	6,100	6,100
56	10,300	10,300	64	7,500	7,500	69	5,900	5,900
64	9,500	9,500	71	7,100	7,100	75	5,900	5,900
71	8,800	8,800	77	6,700	6,700	82	5,600	5,600
77	8,200	8,200	83	6,400	6,400	87	5,400	5,400
85	7,600	7,000	91	6,200	6,200	94	5,300	5,300
93	6,500	5,700	98	5,900	5,300	101	5,200	5,100
100	5,500	4,700	105	5,200	4,400	107	5,000	4,300
106	4,700	3,900	110	4,400	3,700	113	4,300	3,600
113	3,900	3,100	117	3,700	3,000	119	3,600	2,900
121	3,200	2,400	124	3,000	2,400	125	3,000	2,300
127	2,500	1,800	129	2,400	1,900			
133	2,000	1,300	134	1,900	1,500			
140	400	400						

57 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
47	6,500	6,500	63	4,500	4,500	73	3,300	3,300
54	6,400	6,400	69	4,300	4,300	79	3,200	3,200
60	6,200	6,200	74	4,100	4,100	84	3,100	3,100
69	6,000	6,000	82	3,900	3,900	91	3,000	3,000
78	5,400	5,400	90	3,700	3,700	98	2,900	2,900
86	4,900	4,900	97	3,500	3,500	105	2,800	2,800
94	4,500	4,500	104	3,300	3,300	111	2,700	2,700
104	4,200	4,200	112	3,100	3,100	118	2,600	2,600
112	3,800	3,800	120	2,900	2,900	126	2,500	2,500
120	3,500	3,400	127	2,800	2,800	132	2,500	2,500
128	2,800	2,800	134	2,700	2,700	137	2,400	2,200
136	2,000	2,000	141	2,000	2,000	143	2,000	1,700
144	1,600	1,600	148	1,600	1,600	149	1,600	1,200
152	1,200	1,200	155	1,400	1,200			
158	1,000	800	160	1,000				
165	300	300						

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.




PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)

# LOAD CHART

## CROSSOVER 6000










### With Jib, Extended










 4,500 lbs

 (100%)

 360°

Standard ASME  
B30.5

32 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
37	12,500	12,500	47	8,500	8,500	53	6,400	6,400
43	11,800	11,800	52	8,100	8,100	57	6,200	6,200
48	11,200	11,200	57	7,800	7,800	62	6,100	6,100
56	10,300	10,300	64	7,500	7,500	69	5,900	5,900
63	9,500	9,400	70	7,100	7,100	75	5,900	5,900
70	8,800	8,400	77	6,700	6,700	81	5,600	5,600
77	8,200	7,400	83	6,400	6,400	88	5,400	5,400
85	7,300	6,200	90	6,200	5,900	94	5,300	5,300
92	6,000	5,200	97	5,400	4,800	101	4,800	4,400
99	5,000	4,300	104	4,700	3,900	107	4,300	3,700
105	4,200	3,500	110	4,000	3,100	112	3,800	3,000
112	3,400	2,700	116	3,300	2,400	118	3,300	2,400
120	2,700	1,900	123	2,600	1,600	124	2,600	1,600
126	2,100	1,300	129	2,000	1,000			
133	1,600	800	134	1,500				
140	400	400						

57 ft Offsettable Jib								
0°			15°			30°		
 ft	 lbs	 lbs	 ft	 lbs	 lbs	 ft	 lbs	 lbs
46	6,500	6,500	63	4,500	4,500	73	3,300	3,300
53	6,400	6,400	69	4,300	4,300	79	3,200	3,200
60	6,200	6,200	74	4,100	4,100	84	3,100	3,100
69	6,000	6,000	82	3,900	3,900	91	3,000	3,000
78	5,400	5,400	90	3,700	3,700	98	2,900	2,900
86	4,900	4,900	97	3,500	3,500	104	2,800	2,800
94	4,500	4,500	104	3,300	3,300	110	2,700	2,700
103	4,200	3,800	112	3,100	3,100	118	2,600	2,600
112	3,800	3,100	120	2,900	2,900	126	2,500	2,500
120	3,500	2,400	127	2,700	2,300	131	2,500	2,200
127	2,800	1,900	133	2,300	1,800	137	2,200	1,700
135	2,100	1,400	141	1,900	1,200	143	1,800	1,200
143	1,500	800	148	1,500	700	149	1,300	700
151	1,000							

### Notes to lifting capacity

Lifting capacities do not exceed 85% of tipping load. Weight of hook blocks and slings is part of the load, and is to be deducted from the capacity ratings. Consult operation manual for further details.

Note: Data published herein is intended as a guide only and shall not be construed to warrant applicability for lifting purposes. Crane operation is subject to the computer charts and operation manual both supplied with the crane.















PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)



# TECHNICAL DESCRIPTION

## CROSSOVER 6000

### Boom, Jib and Rotation

	Four-section full power fully synchronized telescopic boom		
	Boom length	Retracted Extended	35 ft 110 ft
	Boom maximum tip height		118 ft
	Boom elevation angle range (min. / max.)		-4° / 76°
	Boom head		quick reeving
	Installs only on main boom head Compatible with extendable and fixed swing-on jibs		Single nylon sheave
	5 metallic sheaves		60 T
	Independent outrigger controls		
	Load moment / Rated capacity indicator with work area definition ATB system		
Optional			
	Swing-On Jib – fixed length – can be offset to 0°, 15° or 30° Maximum tip height with fixed jib		32 ft 145 ft
	Swing-On Jib – adjustable length – can be offset to 0°, 15° or 30° Maximum tip height with extended jib		33 ft / 57 ft 170 ft
Optional			
	5 metallic sheaves		40 T
	Top swivel ball with hook and latch		7 T

### Boom Rotation

	Foot pedal actuated multi-disc brake and air actuated 360° house lock		
	Hydraulic driven double planetary reduction gear drive		2.8 rev/min

# TECHNICAL DESCRIPTION

## CROSSOVER 6000

### Hoists and Rope

	Two speeds First layer (no load speed) Fifth layer (no load speed)	Low Speed: 184 ft/min 266 ft/min	High Speed: 369 ft/min 533 ft/min
	First layer Fifth layer	Low Speed: 15,639 lb 10,827 lb	High Speed: 10,827 lb 5,052 lb
	Permissible line pull		9,000 lb
			6 x 19 IWRC IPS
	Maximum useable		561 ft
			0.625 in
Optional configuration – for auxiliary hoist			
	Two speeds Fifth layer (no load speed)		High Speed: 533 ft/min
	First layer		Low Speed: 15,639 lb
	Permissible line pull		9,000 lb
Optional configuration – for main or auxiliary hoist			
			0.625 in rotation resistant, compacted strand 18 x 19
			0.625 in

### Hydraulics

	Three pump system Main boom hoist and telescope tandem pump Outrigger and swing Simultaneous operation of hydraulic functions Two-speed hoist	56.8 / 47.0 gal/min @ 3,500 psi 21 gal/min 2,500 psi
	Full flow with bypass protection Suction Return	250 micron screen 5 micron filter
	Pressurized tank with sight level gauge	117 gal



PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)

# TECHNICAL DESCRIPTION

## CROSSOVER 6000

### Upper Operator Cab



Upper cab  
Sliding door on left side  
Sliding window on the right side  
Tilting, tinted glass skylight  
Removable front windshield  
Six-way adjustable seat with armrest dual-axis electro-proportional joysticks  
Joystick control for hoist(s), swing and boom elevation  
Foot pedals for swing brake, boom telescope and engine rpm  
Hand control for engine rpm



Optional features for upper cab  
Air conditioning – hydraulically powered  
Heater and air conditioning package – hydraulically powered  
Liquid propane (LP) cab heater  
Single-axis armrest mounted controls  
Work lights



Rated capacity indicator with pictograph display of boom radius, boom angle, boom length, allowable load, actual load and % of allowable load  
Settable alarms for swing angle, boom length, boom angle, tip height and work area exclusion zone

### Counterweight



Main counterweight with integrated hydraulic removal system is bolted to upper crane structure

4,500 lb counterweight package

Hydraulic system allows weights to be removed and attached without additional lifting equipment for placement on carrier deck



3,000 lb – 3,000 lb

Optional additional counterweight  
7,500 lb total counterweight



3,000 lb – 7,000 lb  
4,000 lb

11,500 lb total counterweight



3,000 lb – 12,000 lb  
4,000 lb  
5,000 lb

16,500 lb total counterweight

### Outriggers



X-pattern

**MAX Front: Swing, Out and Down**  
To outer edge of pad

26 ft

**Rear: Swing, Out and Down**  
To outer edge of pad

26 ft

**MID Front: Swing, Out and Down**  
**Rear: Swing, Out and Down**

20 ft

19.5 ft



PORTLAND OFFICE: 503.283.3111  
SEATTLE OFFICE: 206.784.1054  
[WWW.NESSCAMPBELL.COM](http://WWW.NESSCAMPBELL.COM)